

02 /LED FLOOD LIGHT



Model:WH-FL-S-A



Power & Performance

High quality ADC 12 die-casting aluminum, the aluminum content of 99.6%; good thermal Conductivity, corrosion resistance; adopting the design of combining hollow-out holes and groove together, which can help to consolidate fins, maximize the cooling area and optimize the air channel, thus make it 3D heat dissipation.

FEATURE

- * Offer 110 lm/W lumen performance, available in multiple wattages.
- * High performance thermal management design ensuring low LED junction temperature.
- * Easy installation and maintenance, longer lifetime with high lumen maintenance.
- * Energy savings, no UV and IR radiations, emits low heat.
- * IP65(IP67 optional).




PRODUCTS PARAMETER

Model	Watt	Input Voltage	Luminous Flux	Dimensions	Weight
WH-FL-S-A-10	10	160-270VAC 50/60Hz	110 lm	W126×L125×H55mm	1.0 kg
WH-FL-S-A-30	30	160-270VAC 50/60Hz	3300 lm	W180×L154×H55mm	2.5 kg
WH-FL-S-A-50	50	160-270VAC 50/60Hz	5500 lm	W227×L190×H55mm	3.5 kg
WH-FL-S-A-100	100	160-270VAC 50/60Hz	11000 lm	W268×L310×H55mm	5.0 kg
WH-FL-S-A-150	150	160-270VAC 50/60Hz	16500 lm	W378×L310×H55mm	6.0 kg
WH-FL-S-A-200	200	160-270VAC 50/60Hz	22000 lm	W444×L333×H55mm	6.5 kg



LED FLOOD LIGHT

Dimensions

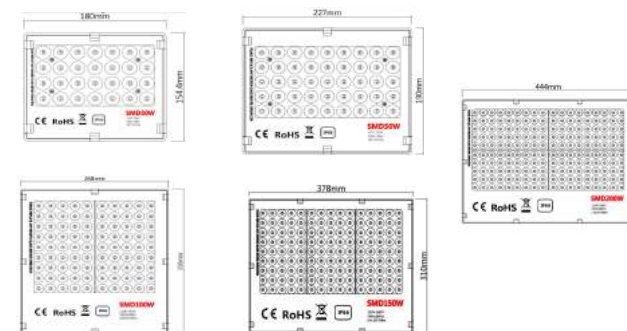


Applications

Roads, railways, subways and other underground lighting; stadium workshop, large warehouse, plant and construction places etc



Light Distribution Curve 110°/90°/60°

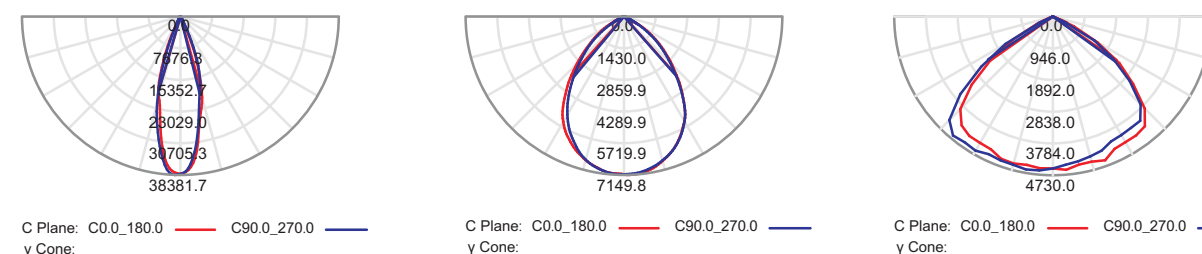

SPECIFICATION

● Light Source: Lumileds / Cree Beam Angle:	Lifespan: 50,000 H
● D110/60	Operating Temp: -40°C~ +50°C
● CCT: 3000K / 4000K / 5000K /6000K CRI:	Dimming: 1-10V / Dali
● CRI>70(or >80 available)	Driver: Meanwell / Philip / Our brand Driver